


Galvanized Seamless Pipe

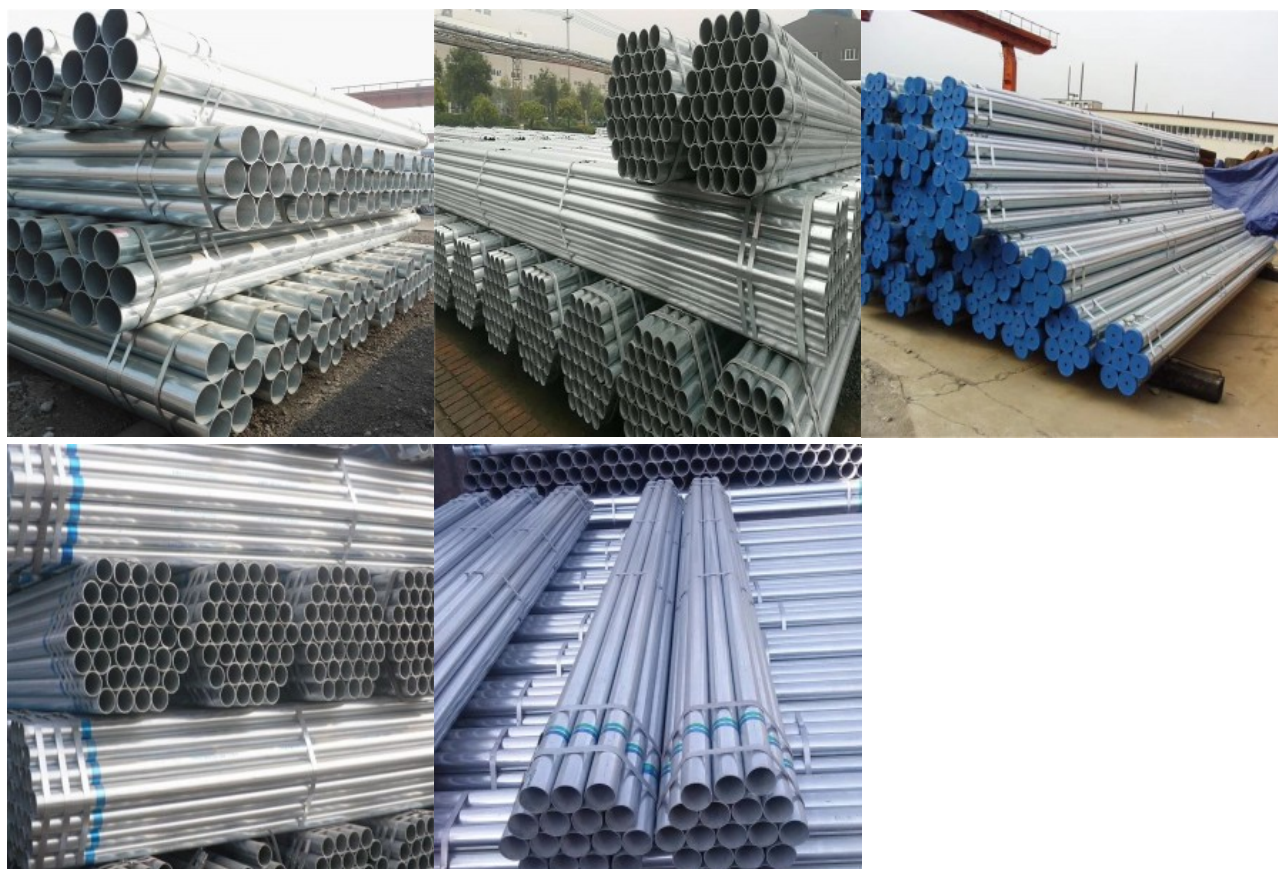

Hot Dip Galvanizing Process

Material Inspection (Steel Pipe) --- Hanging --- De-greasing --- Rinsing --- Pickling --- Washing --- Dipping Fluxing --- Hot Air Drying --- Inside and Outside Hot-dipped Galvanizing Blow

--- Cooling --- Passivation and Rising --- Unloading --- Inspection and Trimming --- Type Identification --- Packaging and Storing and Transportation

Commodity	Galvanized Seamless Pipe
OD	21.3mm ~ 406.4mm
thickness	0.5mm ~ 20mm
length	0.3mtr ~ 18mtr
material	Q195—Grade B, SS330, SPC, S185Q215—Grade C, CS Type B, SS330, SPHCQ235---Grade D, SS400, S235JR, S235JO, S235J2Q345---SS500, ST52
Standard	GB/T13793-1992, GB/T14291-2006, GB/T3091-1993, GB/T3092-1993, GB3640-88BS1387/1985, ASTM A53/A36, EN39/EN10219, API 5L, GB/T9711.1-99 etc
zinc coating	pre galvanized steel pipe: 60-150g/m ² hot dipped galvanized steel pipe: 200-400g/m ²
application	Widely used in Structure, Accessorize, Construction, Fluid transportation, machinery parts, the stress parts of the automobile tractor parts and so on
Package	1) Big OD: in bulk 2) Small OD: packed by steel strips 3) Plastic bags 4) According to customer's requirement
advantage	1. reasonable price with excellent quality 2, abundant stock and prompt

delivery3, rich supply and export experience, sincere service

Product link : <https://www.hnssd.com/galvanized-seamless-pipe.html>